CyberPower®
Reliability. Quality. Value.

DX Series
400~800VA

Our **DX Series UPS Systems** mark a continuation in the tradition of excellence, our engineering team has achieved. They sacrifice neither features nor power to achieve their ***ultra compact size***, and mark the right choice for a Home or SOHO application environment. They are designed for customers who value versatility, manageability and performance on an ***ultra compact and amazingly lightweight*** platform*!*

These series have been developed on an all new ***High Frequency Inverter*** *and* ***High Efficiency Charger, Energy-Saving*** hardware platform designed to meet virtually all of today's ***Home/SOHO*** needs, thereby reducing your dependence on multiple systems. With 3-main battery & surge backed outlets, enhanced safety features and a highly controlled operation, you can go ahead and connect onto them your most precious electronic devices and your emergency running systems, being ready in case of a power outage!

Unique features within these models make them easy to use and manage, protecting your investment for many years to come! From functionality down to aesthetic details, our **DX UPS Series** give and overall high-tech impression, and we are proud to recommend them to you!

Back Panel UK type *Back Panel EU type*

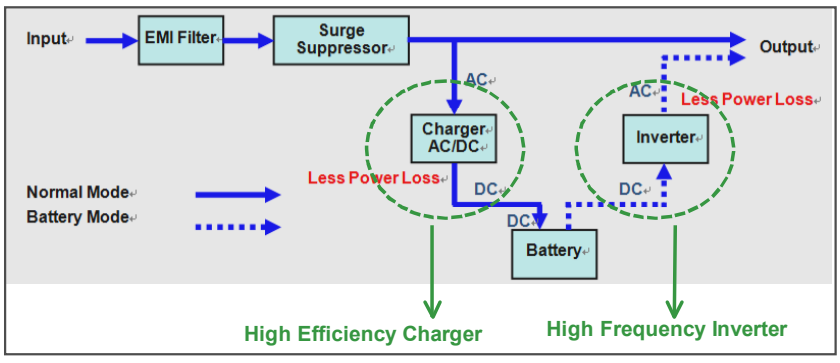

- **Energy Saving GreenPower UPS™ System**
- ***High Frequency Inerter*** **and** ***High Efficiency Charger*** **Technology for Energy Efficiency and Longer Battery Runtime**
- **CPU based full Digital Control**
- **EMI, RFI, Surge & Lightning Spike Protection**
- **LED Array based, Battery Charge Level Monitoring System**
- **Elaborate Power Management Software Included**
- **We offer 25,000.- EUR Connected Equipment Life Time Guarantee**
- **Auto-Restart, Auto-Charge, & Scheduled Shutdown Function**
- **Connection to PC via USB port**
- **Ultra Compact Lightweight Design and High Reliability, with Great Performance Output**

PowerPanel® Personal Edition Management S/W

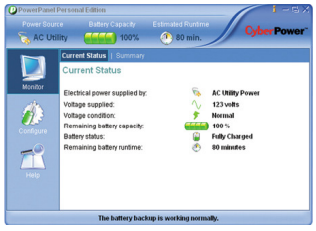

AUTO-SHUTDOWN SOFTWARE
CyberPower PowerPanel® Personal Edition Management Software, is Compatible with Windows 7, VISTA, XP, 2000 Pro., ME, 98, Windows Server 2003/2008, Mac and Linux.

® Cyber Power Systems B.V. All rights Reserved.

CyberPower®
Reliability. Quality. Value.

DX Series
400~800VA

CAPACITY & RUN-TIME:
• **DX 400E:** 400VA or 240W. **DX 600E:** 600VA or 360W. **DX 800E:** 800VA or 480W
• TYPICAL RUNTIME: **DX 400E:** 15 min. **DX 600E:** 25 min. **DX 800E:** 36 min

INPUT POWER:
• Voltage Range: 196V ~ 263V
• Frequency Range: 50Hz / 60 Hz (+/- 3Hz) auto-sensing

OUTPUT POWER:
• On Battery Output Voltage: Simulated Sine-Wave at 230V (+/- 10%)
• On Battery Output Frequency: 50Hz / 60 Hz (+/- 1%)
• Typical Transfer Time: 4 ms
• Overload Protection Scheme: On Main Power by *Circuit Breaker*, and on Battery Power by *Internal Current Limiting*

BATTERY INFORMATION:
• Sealed Maintenance-Free Lead-Acid Batteries, Easily Replaceable by User
• **DX 400E:** 12V, 4.5 AH x 1. **DX 600E:** 12V, 7 AH x 1. **DX 800E:** 12V, 8.5 AH x 1
• Typical Recharge Time: 8 Hours

STATUS INDICATORS:
• Power-On LED
• Using Battery LED
• System Fault LED
• LED Array based, Battery Charge Level Monitoring System
• Audio Alarms for: Overload, On-Battery, and Low-Battery

RECEPTACLES:
• Three plugs, Schuko or French type for the Continental European version, or,
• Two UK type plugs and One IEC type plug for the UK version

CONNECTORS:
• USB Connector to PC

MANAGEMENT & CONTROL:
• Manual Self-Test
• Auto Re-Charge
• Auto Re-Start
• Scheduled Shutdown Function
• Power Panel® Personal Edition elaborate software for PC connectivity and Management Control

PHYSICAL INFORMATION:
Dimensions: 235 (L) x 90 (W) x 190 (H) mm
Weight: **DX 400E:** 2.7kg. **DX 600E:** 3.4kg. **DX 800E:** 3.9kg
Storage Temperature: -15ºC ~ +45ºC
Operating Temperature: 0ºC ~ 40ºC
Operating Humidity: 0%~95% non-condensed

Top Panel

ENERGY-SAVING TECHNOLOGY

climate savers smart computing

CONNECTED EQUIPMENT €25,000 LIFETIME GUARANTEE

DISTRIBUTED BY:

CyberPower's Manufacturing Facilities are **ISO 9001:2000**, **ISO 14000,** and **QC080000** Approved

® Cyber Power Systems B.V. All rights Reserved.